

SCH-32F-SQ



认证号: E476814

认证号: R50395611

认证号: CQC18002196605

特性 Features



1. 10A 触点切换能力 10A switching capability
2. 具有 250VAC 负载能力 possess 250VAC
3. 触点与线圈间介质耐压 4000VA Dielectric strength 4000VA.(between coil and contacts)
4. 一组常开触点形式 1Form A configurations available
5. 塑封和防尘罩型可选 Wash tight and flux proofed types available
6. F 级绝缘等级 Thermal class F
7. 环保产品 (符合 RoHS) Environmental friendly product (RoHS)
9. 外形尺寸 Outline Dimensions: (18.5x 10.5x 15.5) mm

触点数据 Contact data

| | | |
|------------------------------------|-----------------------------|---------------------|
| 触点形式 Contact Arrangement | 1A(1H) | |
| 触点材料 Contact Material | Ag Alloys | |
| 触点负载(阻性) Contact Rating(Resistive) | 10A 30VDC/10A 250VAC | |
| 最大切换功率 Max.Switching Power | 2500VA | |
| 最大切换电压 Max.Switching Voltage | 250VAC | |
| 最大切换电流 Max.Switching Current | 10A | |
| 触点阻性 Contact Resistance | $\leq 100m\Omega$ (1A24VDC) | |
| 寿命 Operation Life | 电气 Electrical | 1×10^5 ops |
| | 机械 Mechanical | 1×10^7 ops |

线圈参数 Coil Parameter

额定线圈功率 Rated coil power 标准型: 约 450mW

| 线圈电压 Coil voltage VDC | 吸合电压 Pick up Voltage VDC | 释放电压 Release voltage VDC | 最大电压 Max voltage VDC | 额定电流 Nominal Current mA | 线圈电阻 Coil Resistance Ω (1 \pm 10%) | 线圈功耗 Coil power consumption W |
|-----------------------------|-----------------------------------|-----------------------------------|-------------------------------|----------------------------------|--|--|
| 5 | 75% Maximum | 10% Minimum | 130% | 91 | 55 | 0.45 |
| 6 | | | | 75 | 80 | 0.45 |
| 9 | | | | 50 | 180 | 0.45 |
| 12 | | | | 37.5 | 320 | 0.45 |
| 24 | | | | 18.8 | 1280 | 0.45 |

注意:1,使用的线圈电压低于线圈额定电压时将会损害继电器的工作.

2,吸合,释放电压仅供检测用,不是设计的使用指标.

Caution:1,The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.

2,Pick up and release voltage are for test purposes only and are not be used as design criteria.

| 技术特性 Operation condition | |
|--|--|
| 绝缘电阻 Insulation Resistance | 1000M Ω |
| 介质耐压 Dielectric Strength | |
| 断开触点间 Between Contacts | 1000VAC |
| 触点与线圈间 Between Contacts and Coil | 2500/4000VA |
| 动作时间（额定电压下） Action time (rated voltage) | ≦ 15ms |
| 释放时间（额定电压下） Release time (rated voltage) | ≦ 5ms |
| 耐冲击 Shock Resistance | 98m/s ² 980m/s ² |
| 抗振性 Vibration Resistance | 10Hz~55Hz 1.5mm 双振幅 Double amplitude 1.5mm |
| 引出端强度 Terminals Strength | 6N |
| 可焊性 Solderability | 280±10℃ 2±1s℃ |
| 环境温度 Ambient Temperature | -40~85℃ |
| 相当湿度 Relative Humidity | 5%~85% RH |
| 质(重)量 Mass | 约 7g |

订货信息 Ordering information

| | | | | | | |
|--|---|---|---|---|---|---|
| <u>SCH - 32F - 1A - 12 - L - S - Q</u> | | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |

- 1, 总称 generic terms
- 2 型号 Part number:
- 3, 触点形式 Contact Arrangement: 1A 常开 (NO)
- 4, 线圈额定电压 Coil rated voltage(V): 5 6 9 12 24 VDC
- 5, 线圈功率 coil power: 空白=0.45w
- 6, 塑封类型 Seal type: S 密封型 无 防尘型
- 7, 负载类型 loadtype: Q=高负载型 空白=标准型

备注:

(1)在洁净环境（不含 H₂S SO₂ NO₂，粉尘等污染物）下使用时，推荐使用防焊剂产品。
 在污染环境（含一定量 H₂S SO₂ NO₂，粉尘等污染物）下使用时，建议使用塑封产品，并在实际使用中确认。


(2)当继电器装入 PCB 板后，如需进行整体清洗，请与我司联系确认，以便提供合适的产品。当不需要整体清洗时，建议优先选用防焊剂产品；

(3)常规产品为黑色外壳，若需其他颜色外壳颜色可特殊定做。

(4)客户特殊要求经我司评审后，按特性号的形式标示。

外形尺寸 Dimensions(mm/Inch)

1A(1H)

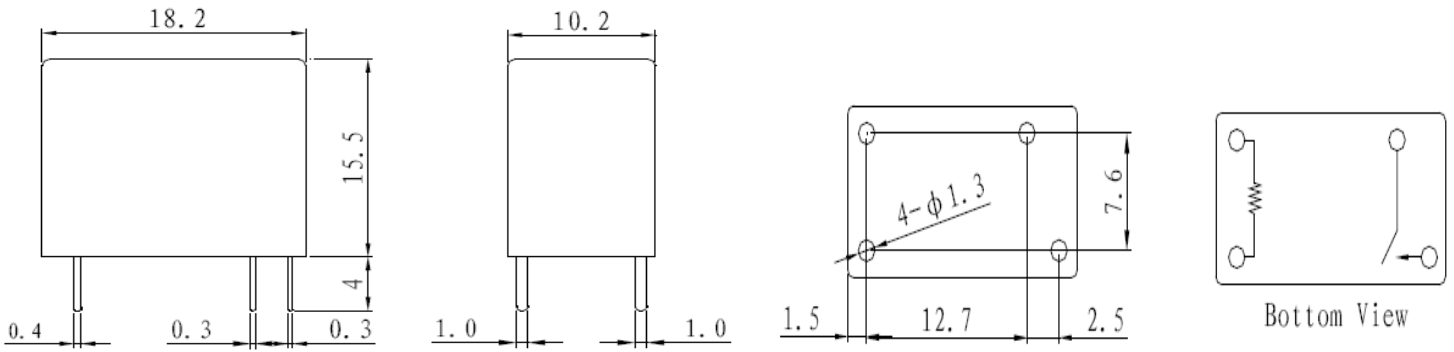

尺寸公差 (Dimension Tolerance) : < 1mm: $\pm 0.2\text{mm}$
1--5mm: $\pm 0.3\text{mm}$
> 5mm: $\pm 0.5\text{mm}$

声明:

本产品说明书仅供客户使用时参考, 若有更改, 恕不另行通知

This datasheet is for the customers'. All the specification are subject to change without notice.

对我司而言, 不可能评定继电器在每个具体应用领域的所有性能参数要求, 因而客户应根据具体的使用条件选择与之相匹配的产品, 若有疑问, 请与我司联系以便获取更多的技术支持, 但产品选型责任仅由客户负责。

We could not evaluate all the performance and all the parameters for every possible application.

Thus the user should be in a right position to choose the suitable product for their own application. if there is any query, please contact xinchuangzhi for the technical service. However, it is the user's responsibility to determine which product should be used only.

© 宁波信创智电器有限公司版权所有, 本公司保留所有权利

© NingBo XinChuangZhi Electric appliance Co.Ltd, All rights of XinChuangZhi are reserved