



Relay



ISO9001、ISO14001 Certification Enterprises

Main Feature

1. Small size (20.4x15.1x23 in mm) produces a switching capacity up to 35A for high density P.C.Board mounting technique and quick Connect Terminal .
2. The contact form construction is 1A/1B/1C
3. The Surge Resistance of 4133 series is 10, 000V
4. Sealing Construction (Free from dust and solder flux): SCH-4133: Plastic duct cover.
5. The selection of plastic insulation material is designed for high temperature and provides better chemical solution performance.
6. RoHS Compliant.

Application

Air Conditioning, Fridge, Washing Machine, etc Household Appliances

Contact Rating

- Nominal Load(Resistive Load $\cos \phi = 1$)
Contact Capacity
SCH-4133-1C.....20Aat14VDC
SCH-4133-1A... ..35Aat14VDC
- Max. Allowable Current
SCH-4133-1C.....20A
SCH-4133-1A35A
- Max. Allowable Voltage
SCH-4133-1A/1CDC14V
- Max. Allowable Power Force
SCH-4133-1C... ..280W
SCH-4133-1A490W
- Contact Material... ..Ag Alloy
- Contact FormSPDT&SPST

Performance (at Initial Value)

- Contact Resistance..... $\leq 100m\Omega$ at 6VDC/1A
- Operate Timems. Max
- Release Time.....ms. Max
- Dielectric Strength:
Between Coil & Contact... ..500VAC at 50/60 Hz
for one minute
Between Contacts.....500VAC at 50/60 Hz
for one minute
- Surge Resistance.....10,000V (between Coil
& Contact 1.2x50 μ s)

- Insulation Resistance... ..1,000 Mega Ω Min. at
500VDC
- Max. On/Off Switching:
Electrical.....30 Ops per minute
Mechanical.....300 Ops per minute
- Temperature Range.....-35~125 $^{\circ}$ C
- Humidity Range... ..45~85% RH
- Coil Temperature Rise.....35 $^{\circ}$ C Maximum
- Vibration:
Endurance... ..10 to 55 Hz dual
amplitude width 1.5mm
Error Operation... ..10 to 55 Hz dual
amplitude width 1.5mm
- Shock:
Endurance... ..981m/s² Min
Error Operation... ..98.1m/s² Min
- Life Expectancy:
Electrical... ..10⁵ Operations at
Rated Resistive
load
Mechanical... ..10⁷ Operations at
No load condition
- Weight.....about18g

Safety Standard & Its File Number

Pending



Relay

ISO9001、ISO14001 Certification Enterprises

Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\pm 10\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
SCH-413	12	125	96	1.5	75% Maximum	10% Minimum	130%
	24	75	320	1.8			

Ordering Information

SCH - 413 - 1C - 12 - P - S

Seal type: S

Coil type : 1.6w/1.8w Standard DC Coil

Receptacl type : P: PCB type Null: Insertion type




Coil Voltage: 12:12V,24:24V

Number of Pole: 1A: One Group NO
1C: One Group NC/NO

Model:4133

Generic Terms: SCH

Dimension QuickConnect Terminal

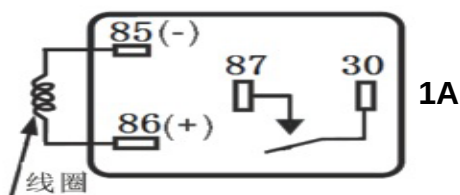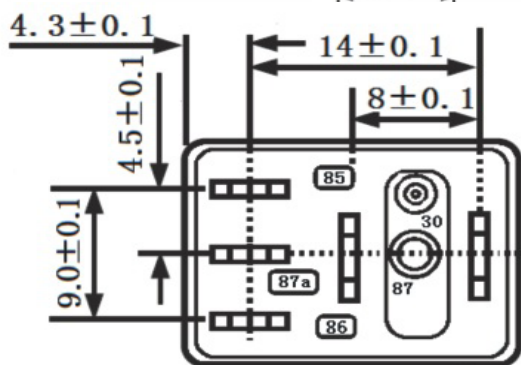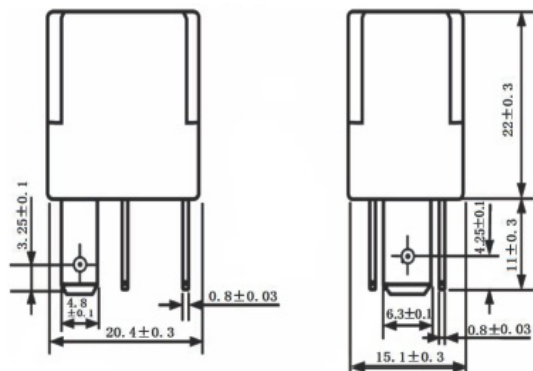

PCB Terminal

